

WHITE BODY


PORCELAIN TILES

600X600 mm



1201

GALICHA SERIES

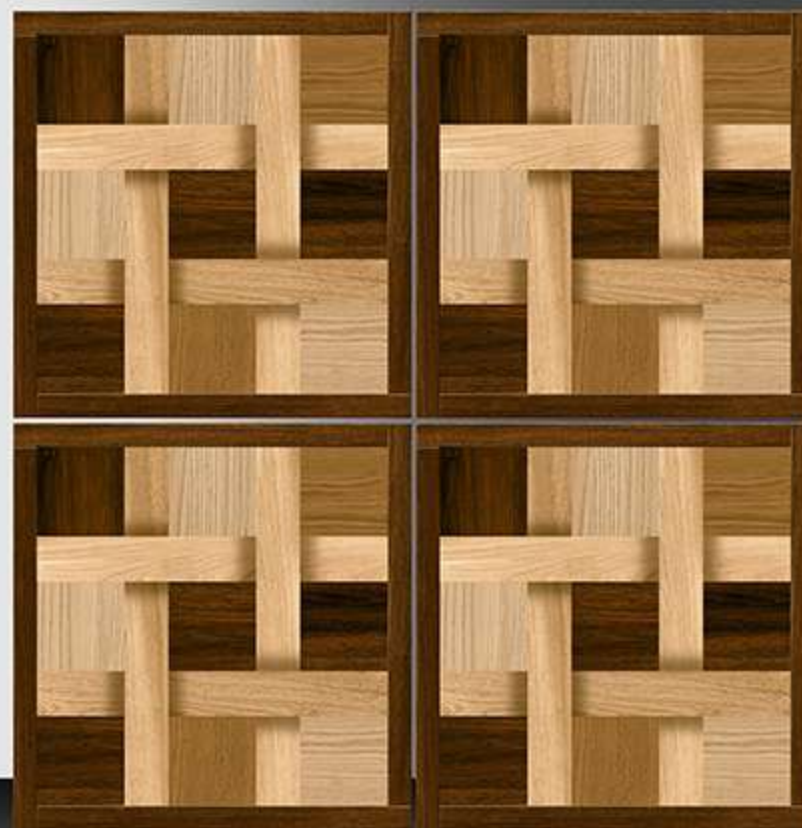

WHITE BODY

PORCELAIN TILES

600X600 mm



1202


GALICHA SERIES



WHITE BODY

PORCELAIN TILES

600X600 mm

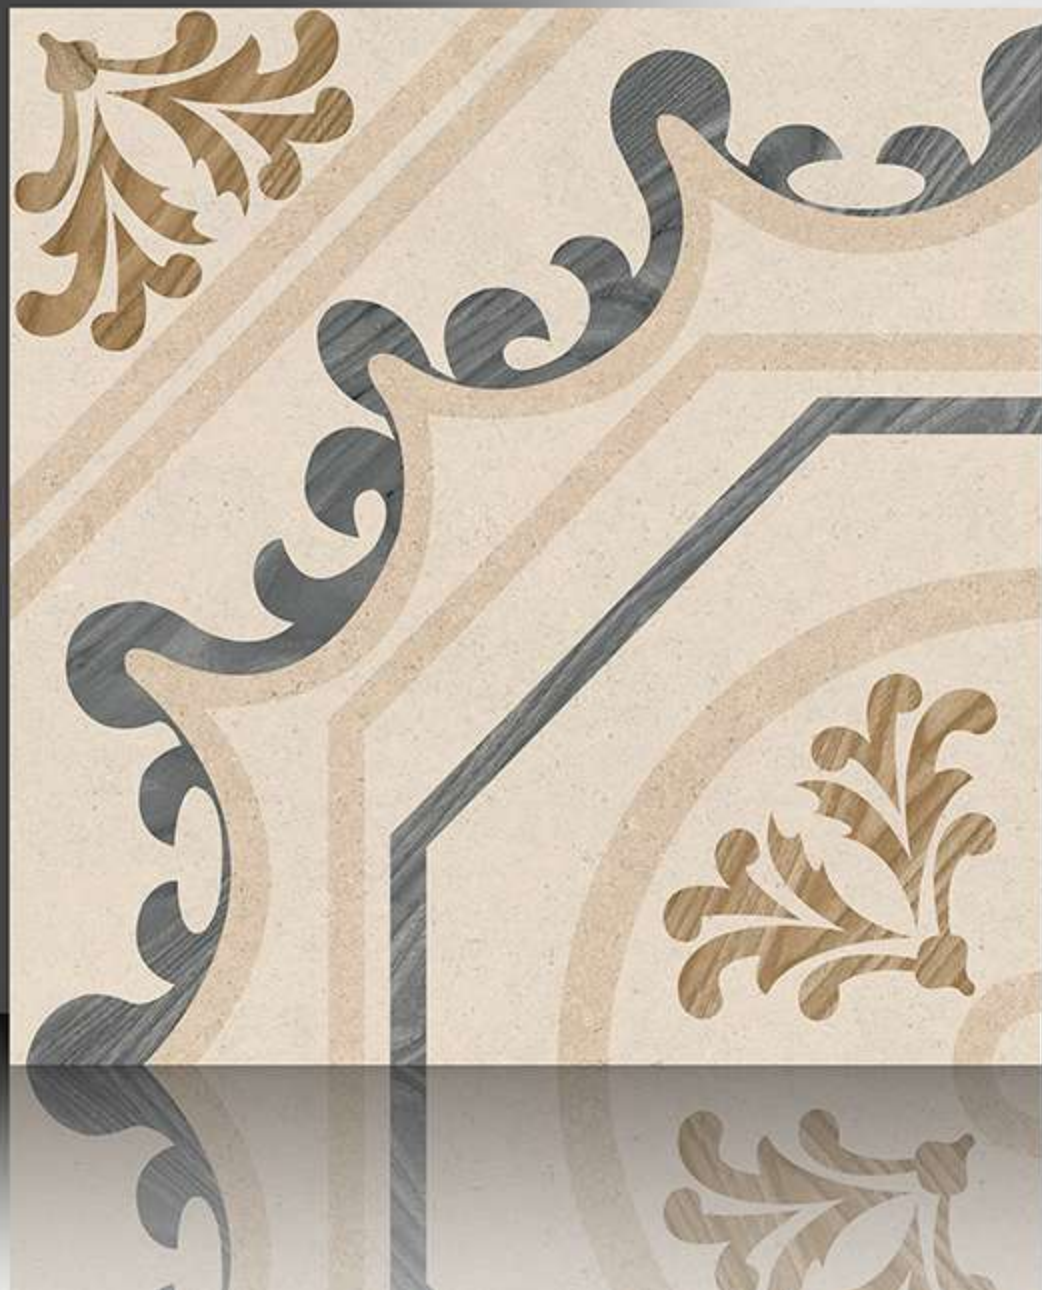

1203

GALICHA SERIES



WHITE BODY


PORCELAIN TILES

600X600 mm



1204


GALICHA SERIES

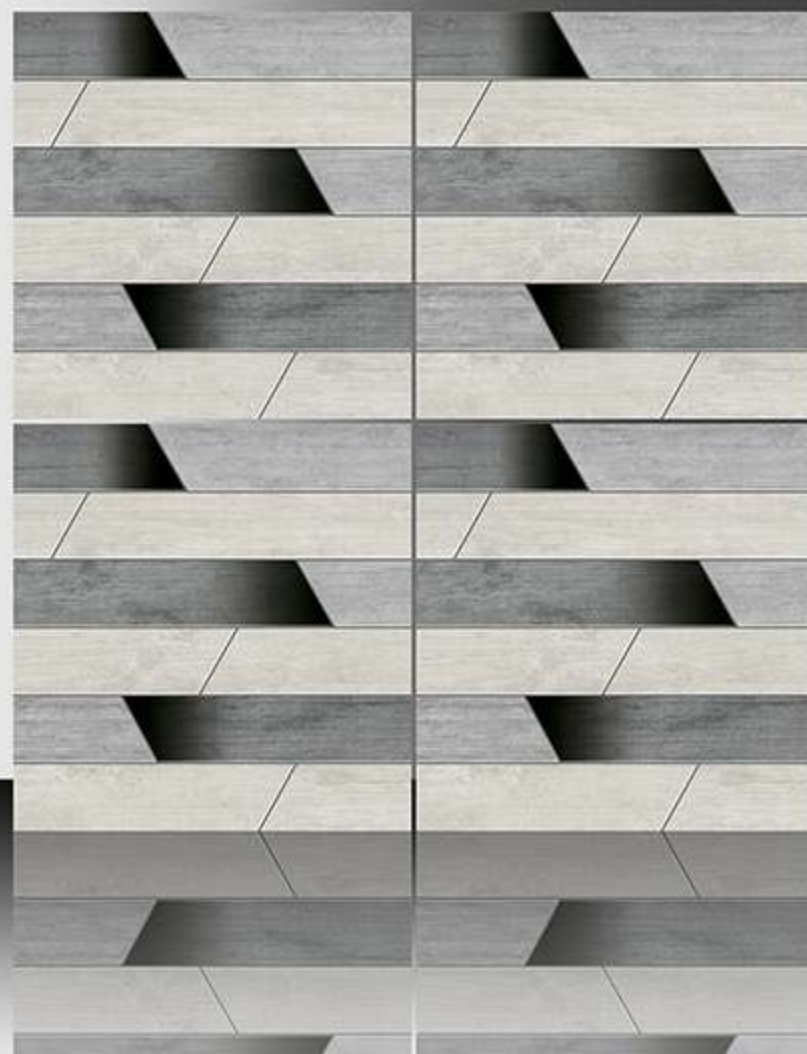

WHITE BODY


PORCELAIN TILES

600X600 mm

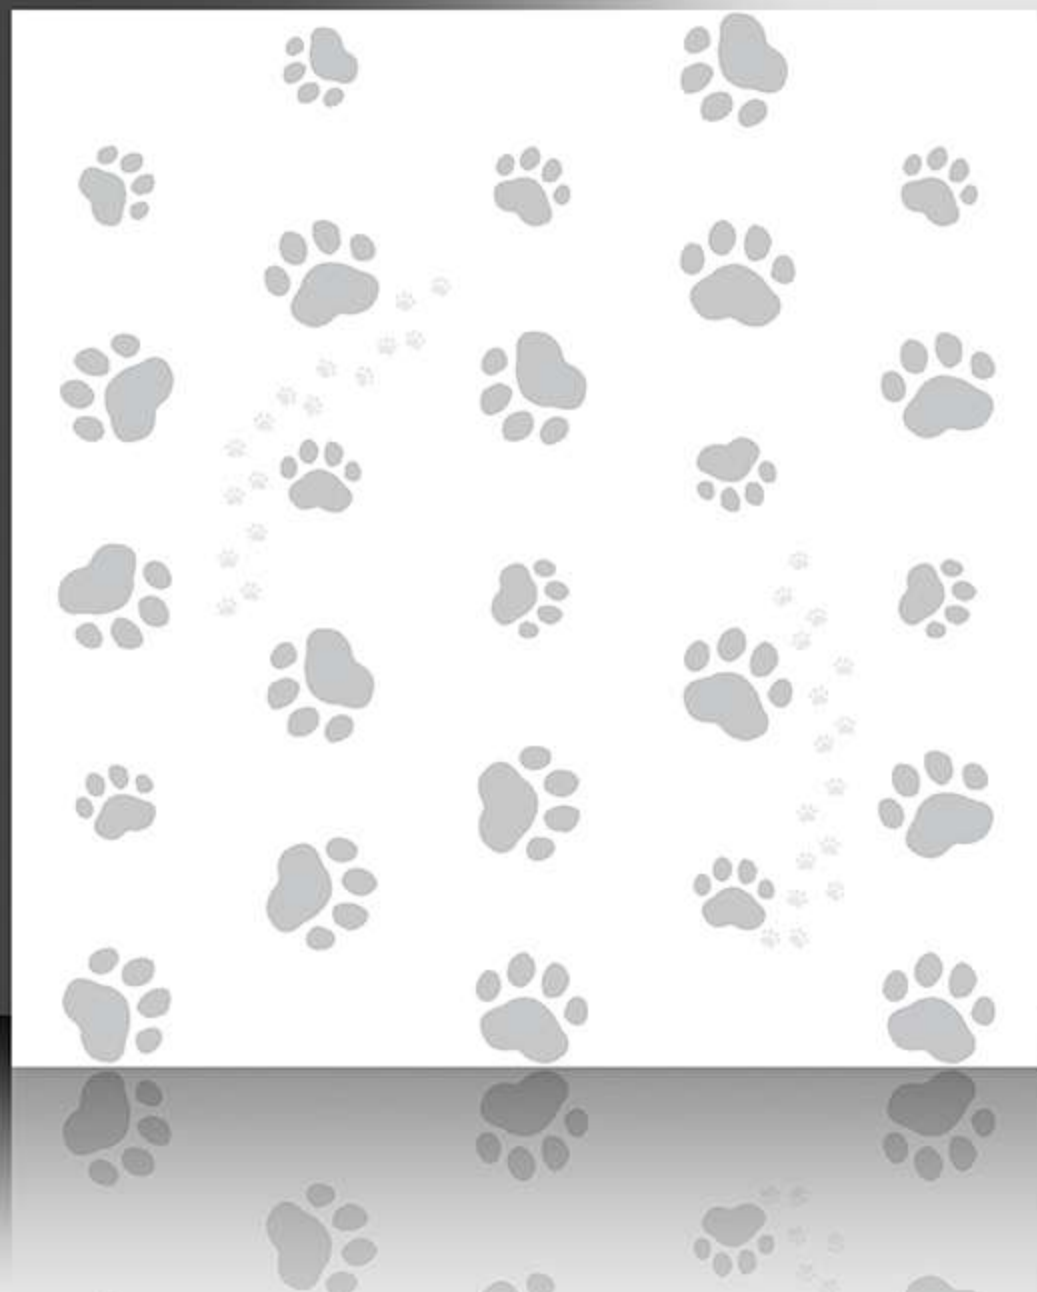

1205


GALICHA SERIES

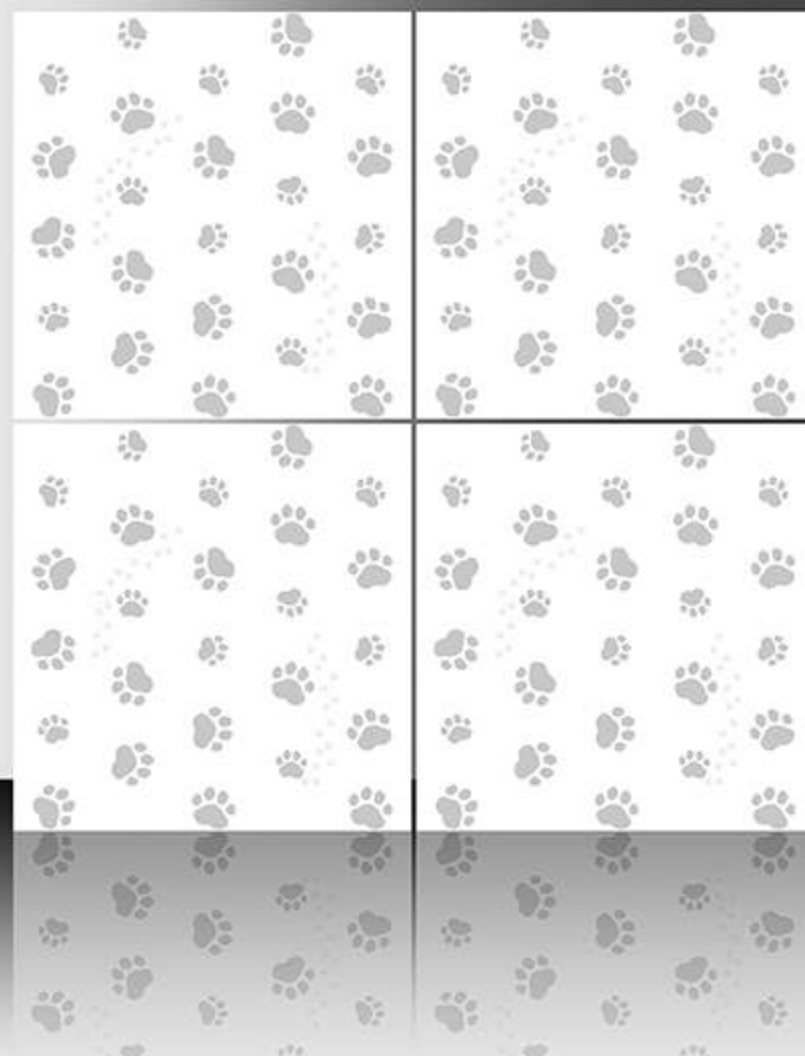

WHITE BODY

PORCELAIN TILES

600X600 mm

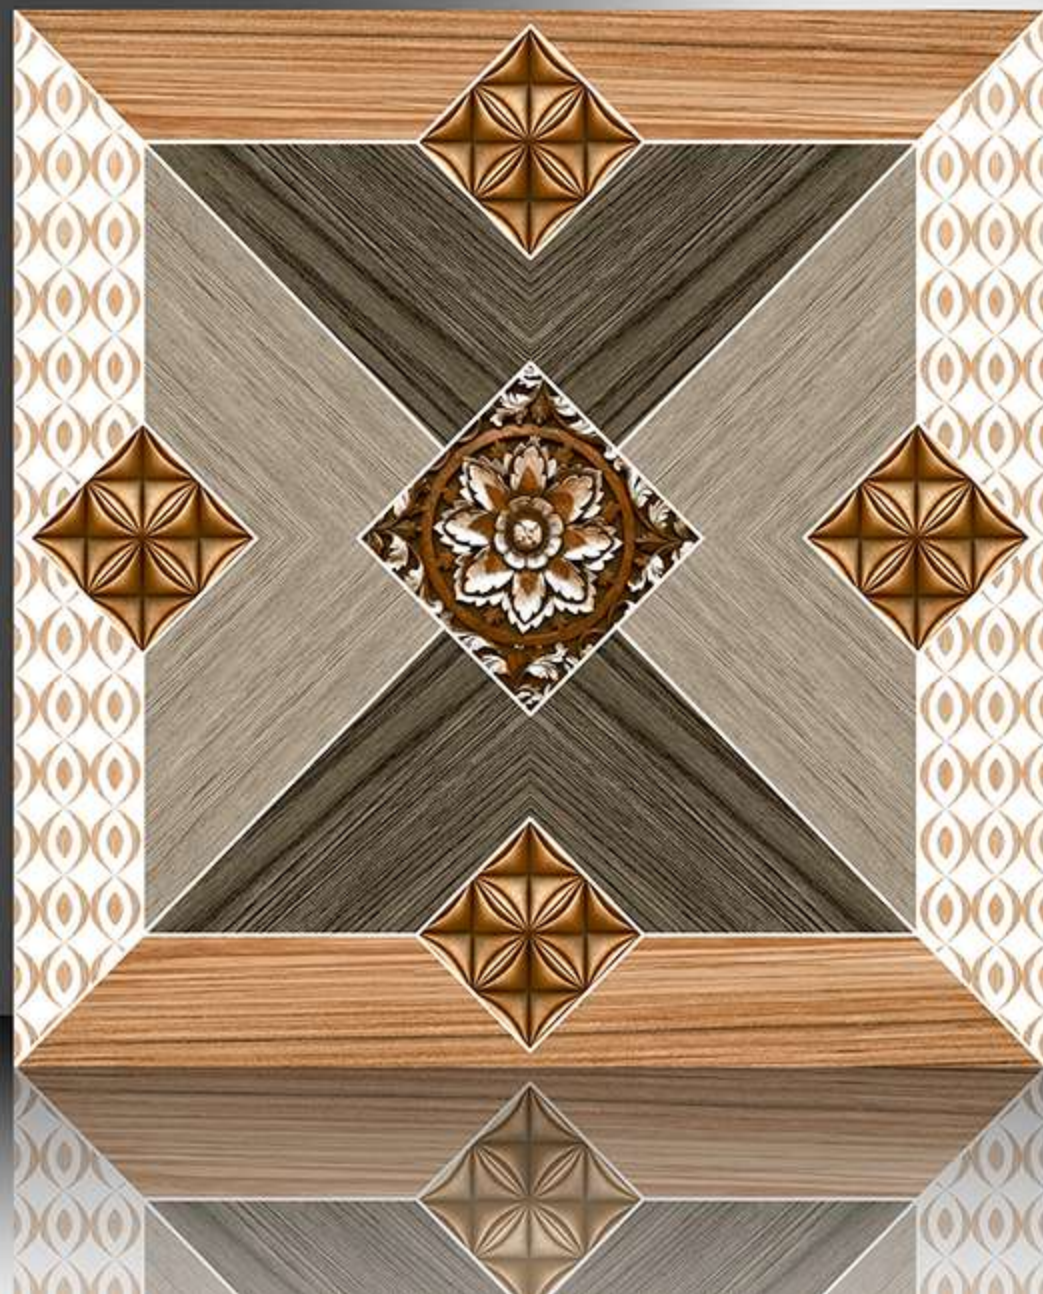

1206

GALICHA SERIES



WHITE BODY

PORCELAIN TILES

600X600 mm



1207

GALICHA SERIES



WHITE BODY

PORCELAIN TILES

600X600 mm



1208

GALICHA SERIES



WHITE BODY

PORCELAIN TILES

600X600 mm



1209

GALICHA SERIES



WHITE BODY

PORCELAIN TILES

600X600 mm



1212

GALICHA SERIES



WHITE BODY


PORCELAIN TILES

600X600 mm



1213

GALICHA SERIES

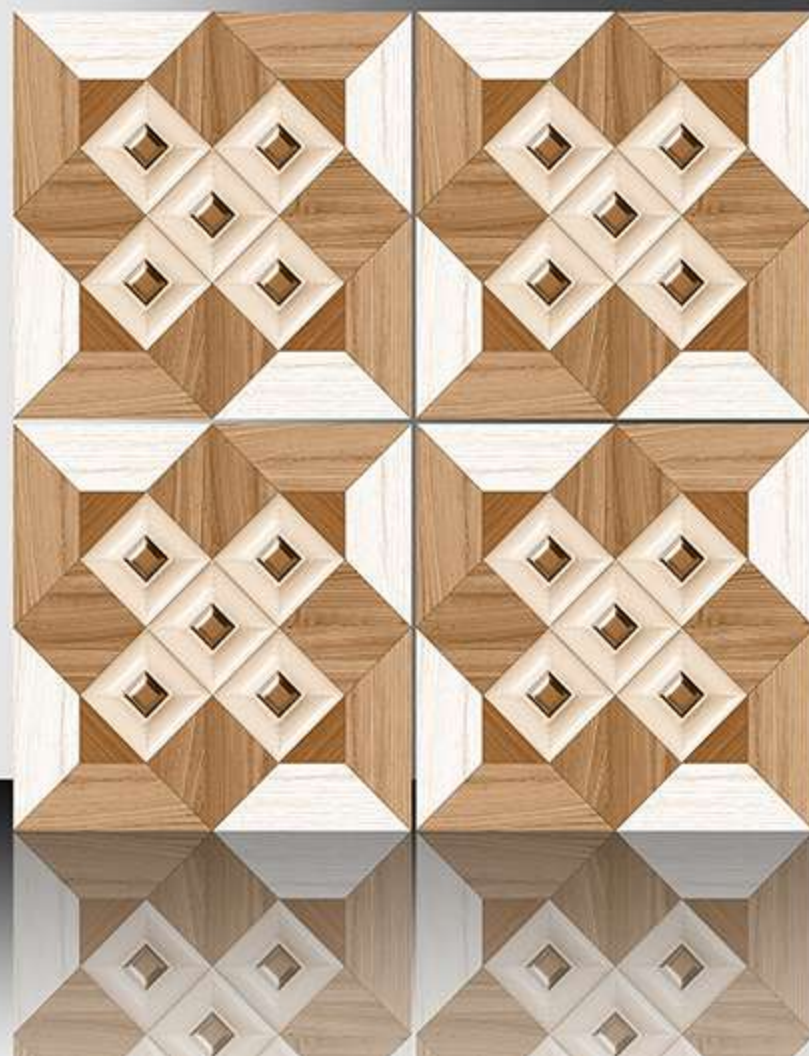

WHITE BODY


PORCELAIN TILES

600X600 mm



1214

GALICHA SERIES

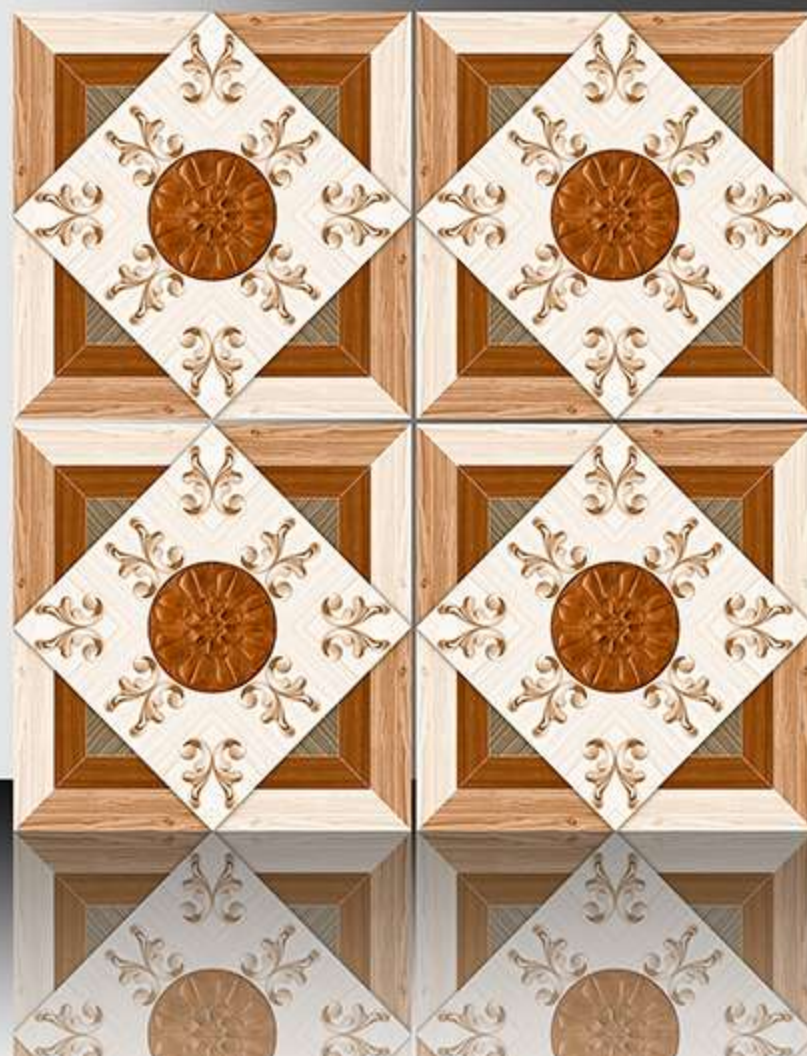

WHITE BODY

PORCELAIN TILES

600X600 mm



1215

GALICHA SERIES



WHITE BODY


PORCELAIN TILES

600X600 mm



1216

GALICHA SERIES

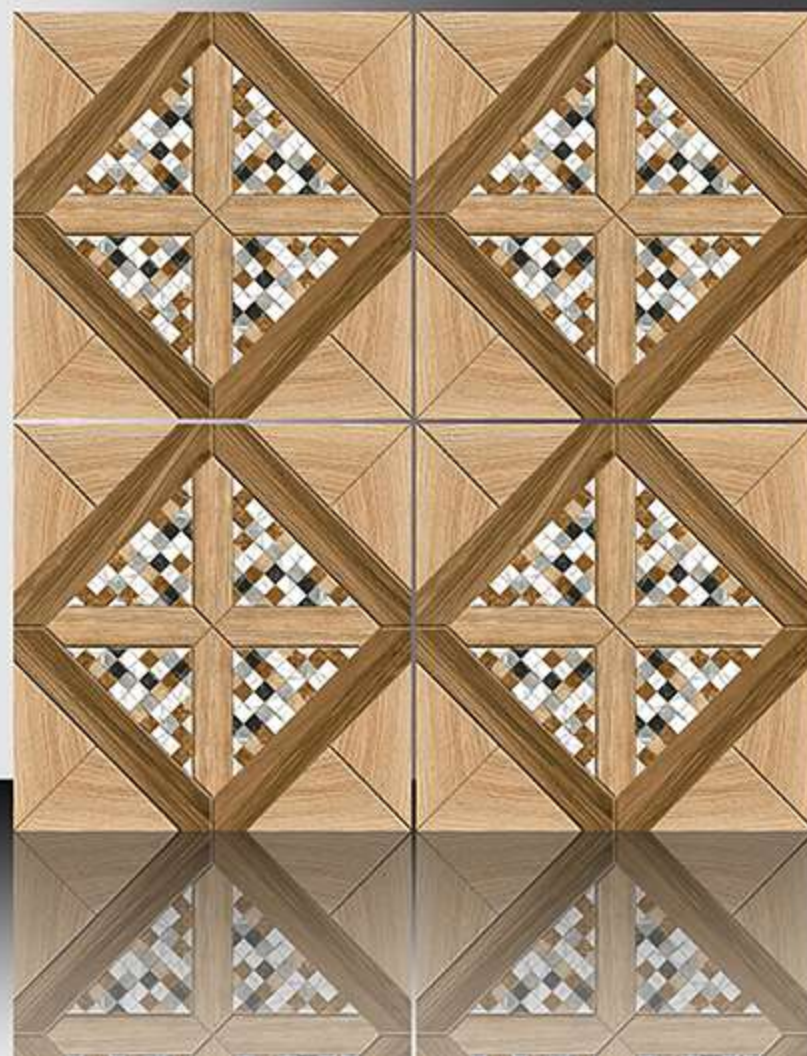

WHITE BODY

PORCELAIN TILES

600X600 mm



1217


GALICHA SERIES



WHITE BODY


PORCELAIN TILES

600X600 mm

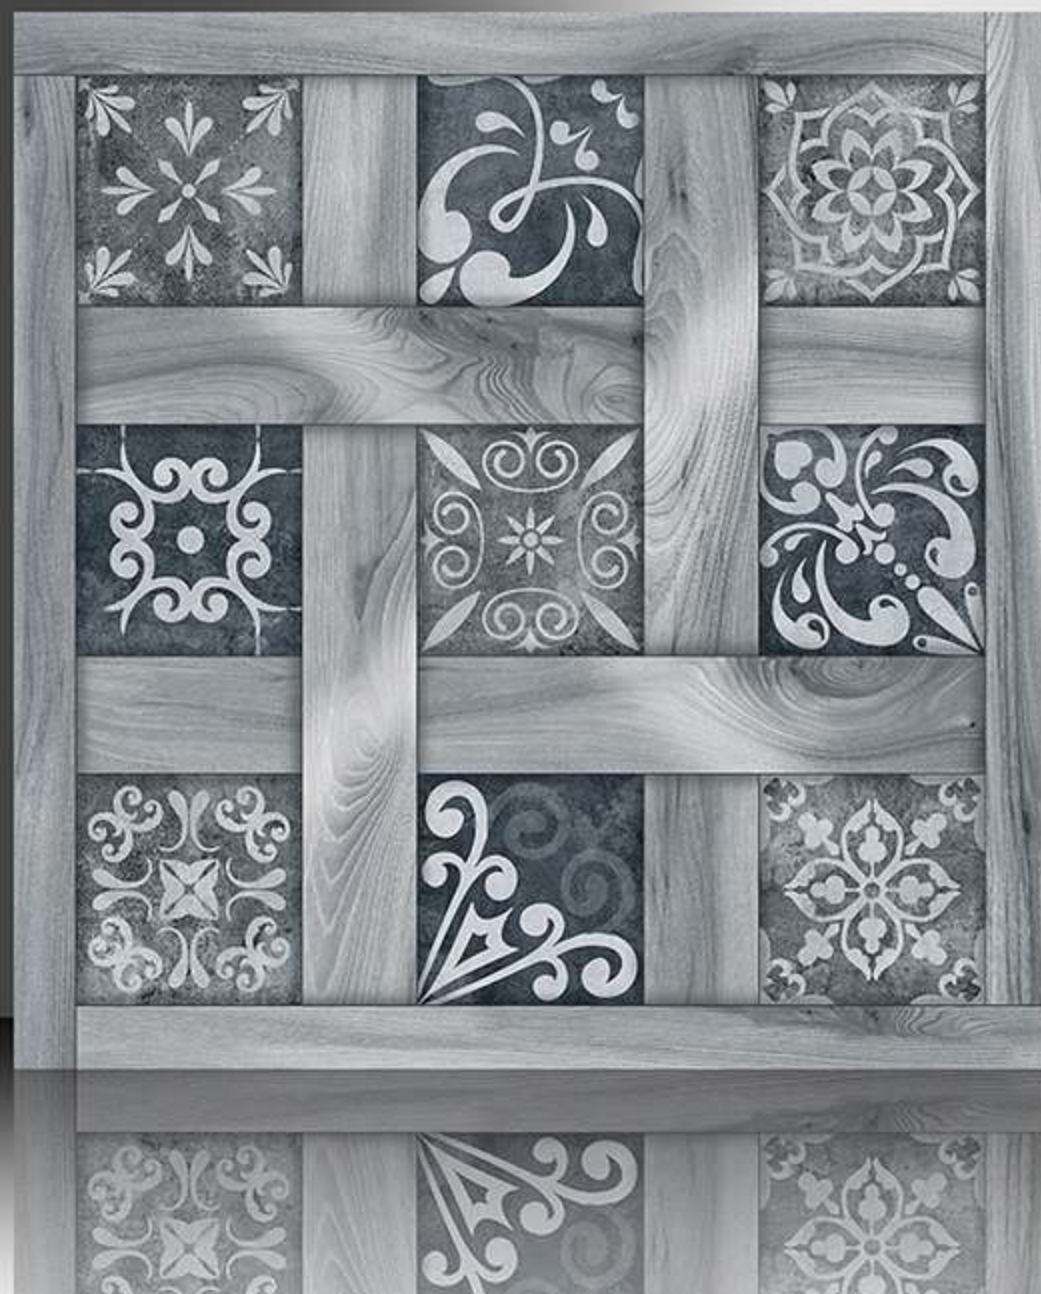

1218

GALICHA SERIES

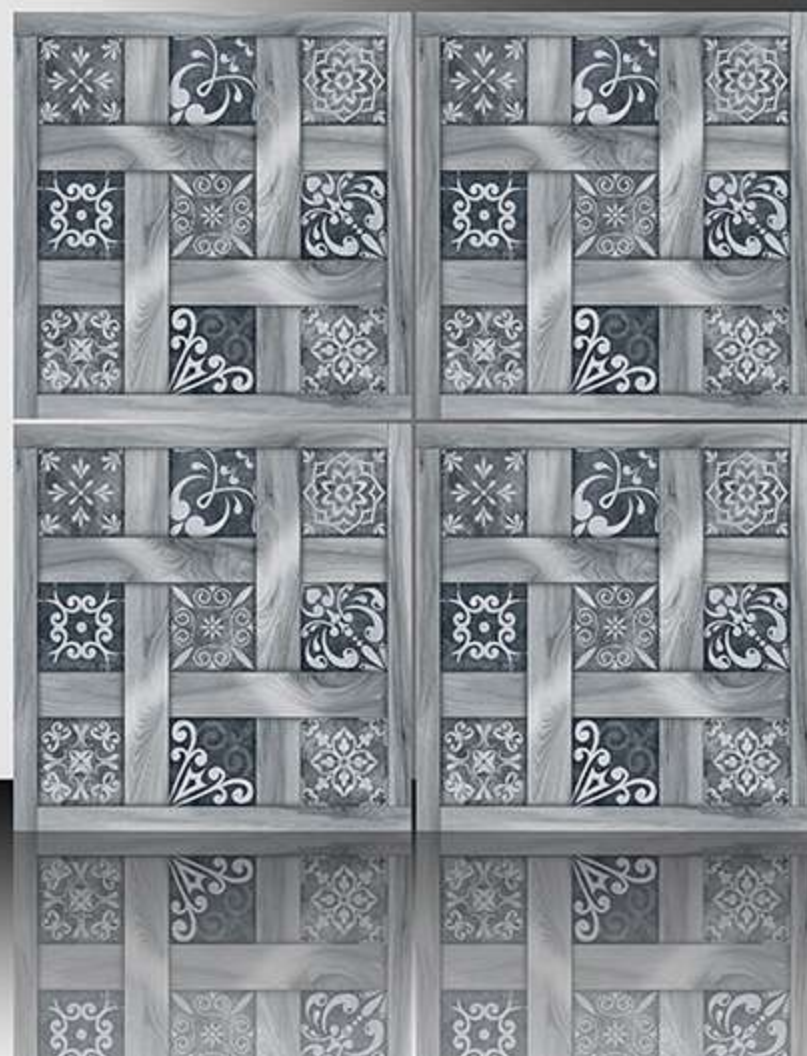

WHITE BODY

PORCELAIN TILES

600X600 mm



1219

GALICHA SERIES



WHITE BODY

PORCELAIN TILES

600X600 mm



1220

GALICHA SERIES



WHITE BODY


PORCELAIN TILES

600X600 mm



1221

GALICHA SERIES

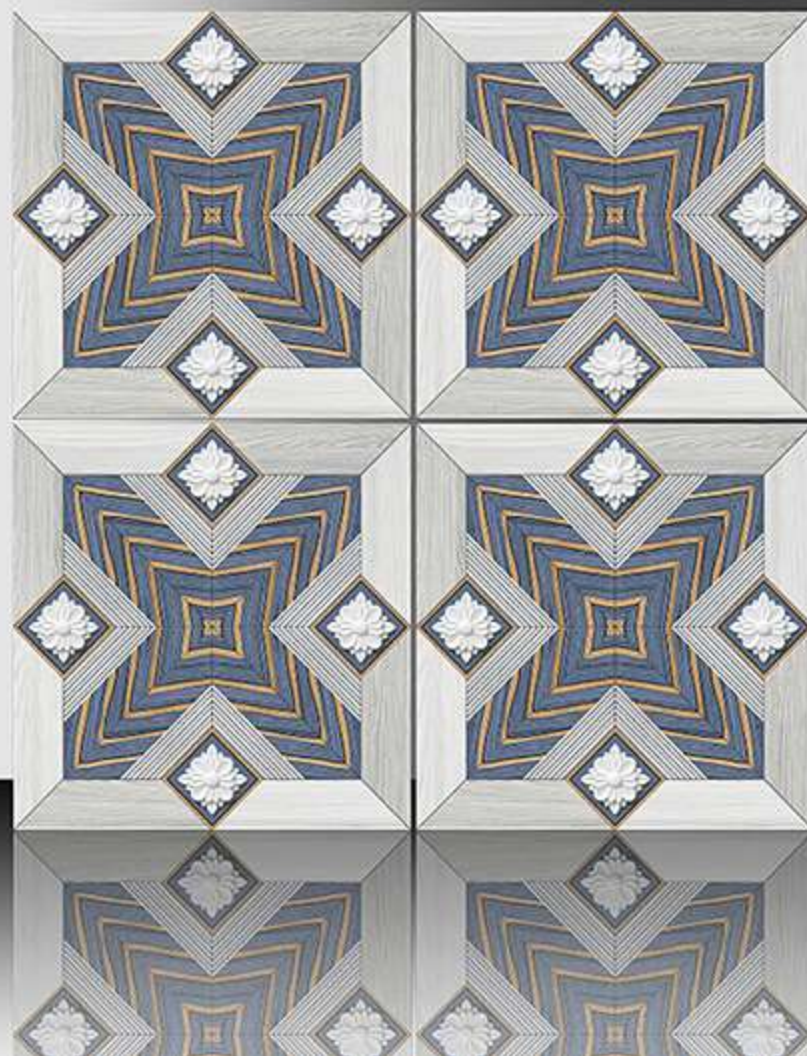

WHITE BODY


PORCELAIN TILES

600X600 mm



1222


GALICHA SERIES

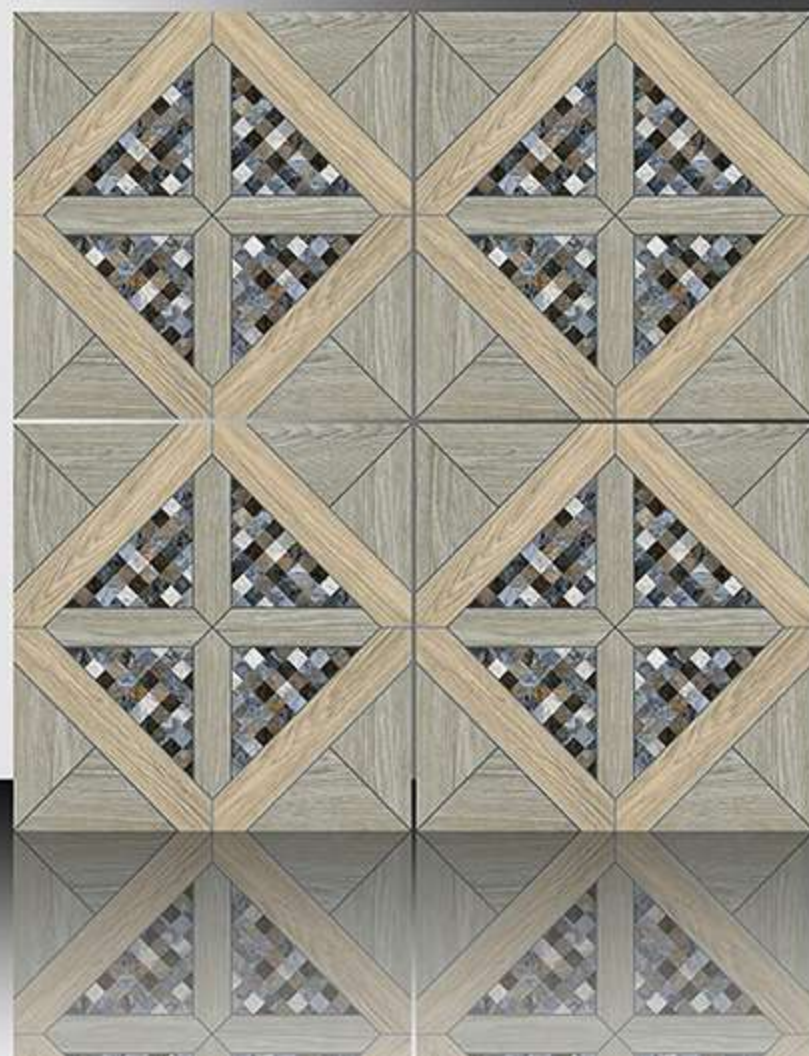

WHITE BODY

PORCELAIN TILES

600X600 mm

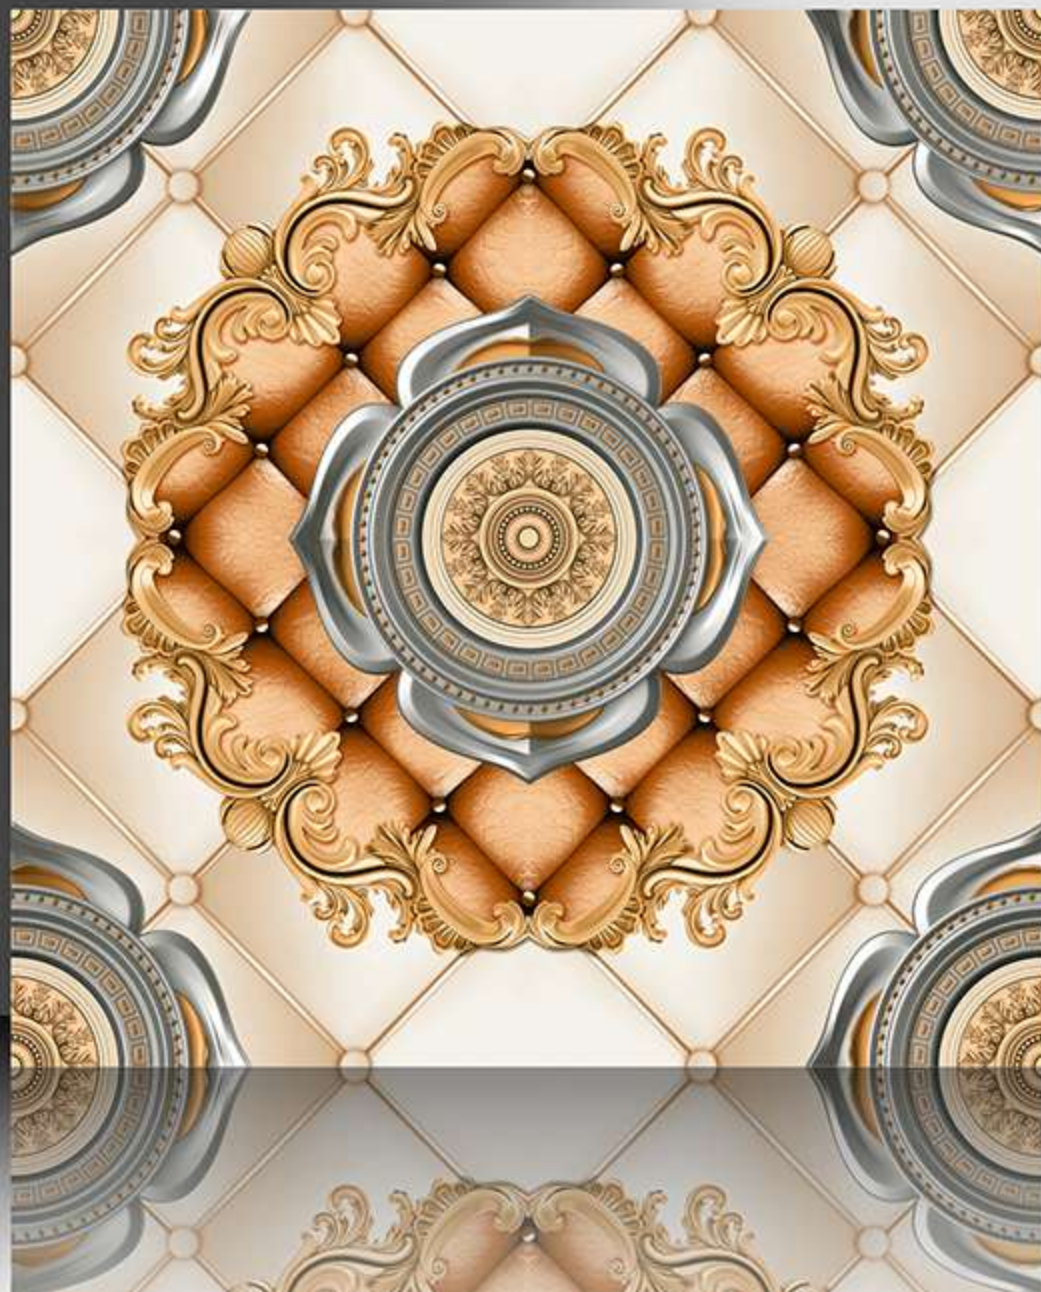

17123

Sugar Series



TECHNICAL SPECIFICATION

Particulars	Standard as per ISO 13006/EN 176	OUR VALUE	METHOD OF TESTING
Deviation in length	± 0.50%	± 0.3%	EN 98
Deviation in Thickness	± 5%	± 3%	EN 98
Straightness Of Sides	± 0.5%	± 0.3%	EN 98
Rectangularity	± 0.6%	± 0.3%	EN 98
Surface Flatness	± 0.5%	± 0.3%	EN 98
Water Absorption	< 3	3 < 4	ISO 10945.3 EN 98
Mohs Hardness	> 5	> 5	EN 101
Flexural Strength	> 35 N/Sq.mm	> 39 N/Sq.mm	—
Abrasion Resistance	As specified by Manufacturer	PE 3	ISO 10545.6 EN 102
Frost Resistance	Frost Proof	Frost Proof	ISO 10534 - 11
Chemical Resistance	No Damage	No Damage	ISO 10534 - 18
Thermal Shock Resistance	No Damage	No Damage	ISO 10545 - 9
Colour Resistance	No Damage	No Damage	—
Stain Resistance	Resistance	Stain Proof	ISO 10545 - 14
Moisture Expansion	NIII	NIII	ISO 10545 - 10
Crazing Resistance	Min 2 Cycle	Min 4 Cycle	—

Note : Colour Shown are as accurate as the limitations of the printing process will allow. Prospective Customer Are advised to inspect a sample of the tiles before ordering every effort has been made to ensure the Accuracy of the information given. However, the Company reserves the right to change the specifications without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advice you to follow the fixing instruction on the cartons of the tiles as on responsibility can be accepted by the company once the tiles have been fixed.

PACKING DETAIL

Size	Thickness	No. of Tiles	Area Approx.	Weight Approx.
600 X 600 MM	9 MM	4 Pcs.	1.44 Sq. Mtr.	25.5 Kg.

UTILITY OF FLOOR TILES

